


K-FI RUECKSPUEL M DRUCKREGLER

Back-flushing filters with pressure regulator

HANSA FLEX

Karakteristike

Ulazni tlak	Max. 16 bar
Okolna temperatura	+5 °C to +40 °C
Temperatura vode min.	5 °C
Temperatura vode max.	30 °C
Veličina pora u filterarskom elementu	90 µm (first filter element), 110 µm (second filter element)
Kućište	Brass
Kućište sīta	Impact-resistant plastic
Učīn protoka	at $\Delta p = 0.2$ bar
Drugi podatci	DVGW Zertifikat

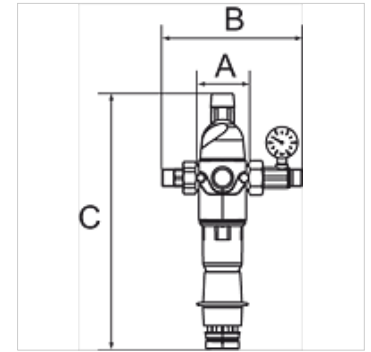

Napomena

Drugi podatci na zahtjev.

Opis

Combined station for filtering and regulating the pressure of drinking and domestic water in addition to well, process and cooling water for once-through cooling systems, consisting of a diaphragm pressure regulator with a pressure-reduced single-seated valve and a back-flushing filter. The filter candle must be cleaned manually at regular intervals by back-flushing (flushing out dirt particles). Integrated back-flushing element with suction elements, back-flushing lever, wing lever for back-flushing element, hose connection for flushing water.

Artikli

Naziv	Navoj	DN	Regulacijsko područje	Protok, kvs-vrijednost (m ³ /h)	A (mm)	B	C (mm)
K- 07 25 10 11	R 3/4	20	2 - 6 bar	3,0	79,7	213,0 mm	392,8
K- 07 25 10 12	R 1	25	2 - 6 bar	3,5	79,7	213,0 mm	392,8
K- 07 25 10 13	R 1 1/4	32	2 - 6 bar	4,0	79,7	213,0 mm	392,8

Rezervni dijelovi

K-FILTEREINSATZ	Filter insert
K-KUNSTSTOFFBEHAELTER	Plastic tank