


K-ABSPV GEW SCHL

Shut-off valves, thread (input) - pipe (output)

HANSA FLEX

Karakteristike

| | |
|-----------------------|--|
| Radni tlak | maks. 10 bar |
| Protok 6,3bar, p=1bar | 280 NI/min (Ø 6), 470 NI/min (Ø 8) |
| Temperaturno područje | -20 °C to +60 °C |
| Tijelo | Technopolymer |
| Unutarnji dijelovi | nickel-plated brass, brass, technopolymer, stainless steel |
| Brtveni materijal | NBR |
| Montaža | Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut) |
| Simbol | on the housing |

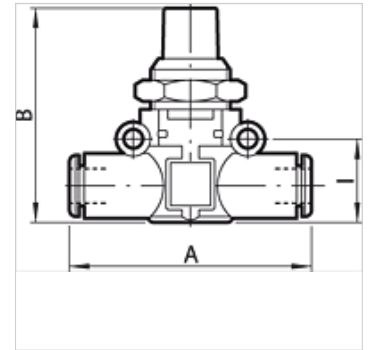

Napomena

Drugi podatci na zahtjev.

Opis

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design. All components can be installed in parallel, in series, in a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

Artikli

| Naziv | Navoj | za promjer crijeva (mm) | A (mm) | B (mm) | l (mm) |
|----------------|-------|-------------------------|--------|--------|--------|
| K- 07 15 04 46 | G 1/8 | 6 | 58,3 | 41,0 | 14,6 |
| K- 07 15 04 47 | G 1/8 | 8 | 66,4 | 46,0 | 18,7 |
| K- 07 15 04 44 | G 1/4 | 6 | 61,3 | 41,0 | 14,6 |
| K- 07 15 04 45 | G 1/4 | 8 | 70,8 | 46,0 | 18,7 |
| K- 07 15 04 48 | G 3/8 | 8 | 72,4 | 46,0 | 18,7 |