

K-RD GEW SCHL

Unidirectional valves, thread (input) - pipe (output)

Karakteristike

Radni tlak	0.5 - 12 bar
Protok 6,3bar, p=1bar	80 Nl/min (Ø 4), 320 Nl/min (Ø 6), 480 Nl/min (Ø 8)
Temperaturno područje	-20 °C to +60 °C
Tijelo	Technopolymer
Unutarnji dijelovi	nickel-plated brass, brass, \ntechnopolymer, stainless steel
Brtveni materijal	NBR
Montaža	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
Simbol	on the housing



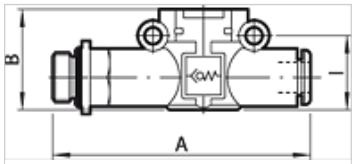

Napomena

Drugi podatci na zahtjev.

Opis

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design.
All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

Artikl

Naziv	Navoj	za promjer crijeva (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 25 34	M 5	4	47,7	17,5	12,8
K- 07 15 25 35	G 1/8	4	50,6	17,5	12,8
K- 07 15 16 59	G 1/8	6	58,3	20,0	14,6
K- 07 15 16 60	G 1/8	8	66,4	26,0	18,7
K- 07 15 16 57	G 1/4	6	61,3	20,0	14,6
K- 07 15 16 58	G 1/4	8	70,8	26,0	18,7
K- 07 15 16 61	G 3/8	8	72,4	26,0	18,7

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.