



# K-SNV ENTLUE V SCHL GEW

Quick-exhaust valves, conveyed exhaust, pipe (input) - thread (output)

**HANSA FLEX**

## Karakteristike

<b>Radni tlak</b>	1 - 10 bar
<b>Protok 6,3bar</b>	50 NI/min (Ø 4), 270 NI/min (Ø 6), 400 NI/min (Ø 8)
<b>Protok Odzračivanje 6,3bar</b>	100 NI/min (Ø 4), 700 NI/min (Ø 6), 1000 NI/min (Ø 8)
<b>Temperaturno područje</b>	-20 °C to +60 °C
<b>Tijelo</b>	Technopolymer
<b>Unutarnji dijelovi</b>	nickel-plated brass, brass, lntechopolymer, stainless steel
<b>Brtveni materijal</b>	NBR
<b>Montaža</b>	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
<b>Simbol</b>	on the housing

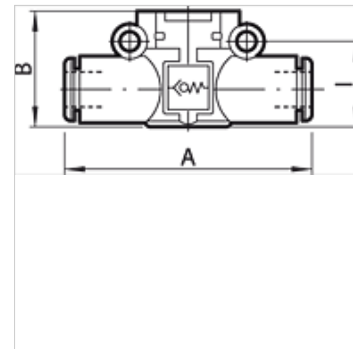

## Napomena

Drugi podatci na zahtjev.

## Opis

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design. <br>All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

## Artikli

Naziv	Navoj	za promjer crijeva (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 20 36	G 1/8	6	58,5	30,2	14,6
K- 07 15 20 37	G 1/8	8	66,2	35,9	18,7
K- 07 15 20 34	G 1/4	6	61,5	30,2	14,6
K- 07 15 20 35	G 1/4	8	70,6	35,9	18,7
K- 07 15 20 38	G 3/8	8	72,2	35,9	18,7