K-RUNDZYLINDER DOPP O D 1


Round cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Karakteristike

Mediji	Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Radni tlak	Max. 10 bar
Proradni tlak	0,4 bar (Ø 32 und Ø 40), 0,3 bar (Ø 50)
Temperaturno područje	-10 °C to +80 °C
Konstrukcija	Screwed joint between stainless steel barrel and heads
Klipnjača	C45 steel, hard chrome-plated
Cijev	Anodised aluminium
Klip	Technopolymer
Brtveni materijal	NBR



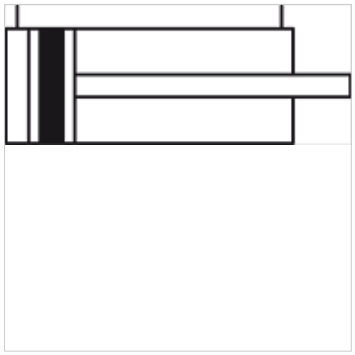

Napomena

Drugi podatci na zahtjev.

Opis

Version with magnetic piston

Napomene uz narudžbu

Note: 500 mm is the maximum stroke available for the double-acting type.

Dodatne informacije

Important: The scope of supply does not include a connector. Please order separately.

Note: 500 mm is the maximum stroke available for the double-acting type.

Artikl

Naziv	Ø klipa	Hod (mm)	Priključak	Navoj klipnjače
K- 07 15 17 29	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 17 30	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 17 31	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 17 32	32 mm	100	G 1/8	M 10 x 1.25
K- 07 15 17 33	32 mm	125	G 1/8	M 10 x 1.25
K- 07 15 17 34	32 mm	160	G 1/8	M 10 x 1.25
K- 07 15 17 35	32 mm	200	G 1/8	M 10 x 1.25
K- 07 15 17 36	32 mm	250	G 1/8	M 10 x 1.25
K- 07 15 17 37	32 mm	320	G 1/8	M 10 x 1.25
K- 07 15 17 38	32 mm	400	G 1/8	M 10 x 1.25
K- 07 15 17 39	32 mm	500	G 1/8	M 10 x 1.25
K- 07 15 17 40	40 mm	25	G 1/4	M 12 x 1.25
K- 07 15 17 41	40 mm	50	G 1/4	M 12 x 1.25
K- 07 15 17 42	40 mm	80	G 1/4	M 12 x 1.25
K- 07 15 17 43	40 mm	100	G 1/4	M 12 x 1.25
K- 07 15 17 44	40 mm	125	G 1/4	M 12 x 1.25
K- 07 15 17 45	40 mm	160	G 1/4	M 12 x 1.25
K- 07 15 17 46	40 mm	200	G 1/4	M 12 x 1.25
K- 07 15 17 47	40 mm	250	G 1/4	M 12 x 1.25
K- 07 15 17 48	40 mm	320	G 1/4	M 12 x 1.25
K- 07 15 17 49	40 mm	400	G 1/4	M 12 x 1.25
K- 07 15 17 50	40 mm	500	G 1/4	M 12 x 1.25
K- 07 15 17 51	50 mm	25	G 1/4	M 16 x 1.5
K- 07 15 17 52	50 mm	50	G 1/4	M 16 x 1.5
K- 07 15 17 53	50 mm	80	G 1/4	M 16 x 1.5
K- 07 15 17 54	50 mm	100	G 1/4	M 16 x 1.5
K- 07 15 17 55	50 mm	125	G 1/4	M 16 x 1.5
K- 07 15 17 56	50 mm	160	G 1/4	M 16 x 1.5
K- 07 15 17 57	50 mm	200	G 1/4	M 16 x 1.5
K- 07 15 17 58	50 mm	250	G 1/4	M 16 x 1.5

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.

K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Artikl

Naziv	Ø klipa	Hod (mm)	Priključak	Navoj klipnjače
K- 07 15 17 59	50 mm	320	G 1/4	M 16 x 1.5
K- 07 15 17 60	50 mm	400	G 1/4	M 16 x 1.5
K- 07 15 17 61	50 mm	500	G 1/4	M 16 x 1.5

Pribor

K-FUSSBEFESTIGUNG 2	Foot model
K-KOPFMUTTER DECKEL BODEN	Hexagon nut (for head)
K-GABELKOEPFE 4	Fork model
K-GELENKAUGEN 5	Rod eye model
K-SCHWENKLAGER 2	Counter-hinge model
K-SENSORHALTER	Sensor support (with T-slot adapter)
K-SENSOREN T-NUT 1	Sensor for T-slot

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.