

K-SCHNELLENTLUEFTUNG V

Quick-exhaust valves

HANSA FLEX

Karakteristike

min. radni tlak 0,5 bar



Radni tlak maks. 12 bara

Radna temperatura Max. 80 °C

Opis navoja G thread acc. DIN EN ISO 228-1

Kućište Nickel-plated brass

Membrana Polyurethane

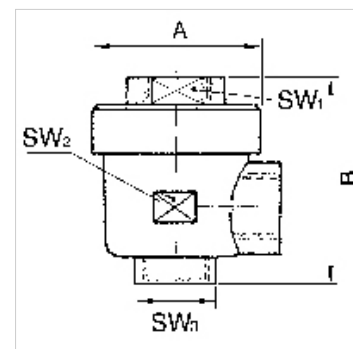

Napomena

Drugi podatci na zahtjev.

Artikli

| Naziv | Navoj | A (mm) | B (mm) | SW1 (mm) | SW2 (mm) | SW3 (mm) |
|----------------|-------|-----------|-----------|-------------|-------------|-------------|
| K- 07 30 25 18 | G 1/8 | 28,0 | 42,0 | 14 | 14 | 14 |
| K- 07 30 25 17 | G 1/4 | 33,0 | 53,0 | 19 | 19 | 19 |
| K- 07 30 25 16 | G 1/2 | 43,0 | 71,0 | 26 | 26 | 26 |

Rezervni dijelovi

K-ERSATZ DICHT Replacement diaphragm, seal