


# K-FI AK KOH METALLBEHAEL MULTIFIX

Activated carbon filters with metal bowl

**HANSA FLEX**

## Karakteristike

|                              |   |
|------------------------------|---|
| Ulazni tlak                  | Max. 16 bar                               |
| Temperatura medija           | max. 60 °C                                |
| Okolna temperatura           | Max. 60 °C                                |
| Brtnveni materijal           | NBR                                       |
| Filterski uložak             | Activated carbon-POM                      |
| Kućište                      | Die-cast zinc                             |
| Drain valve                  | Semi-automatic                            |
| Sadržaj preostalog ulja      | 0.005 mg/m3                               |
| Mjerenje vrijednosti protoka | FA at P1 = 6 bar and $\Delta p = 0.2$ bar |

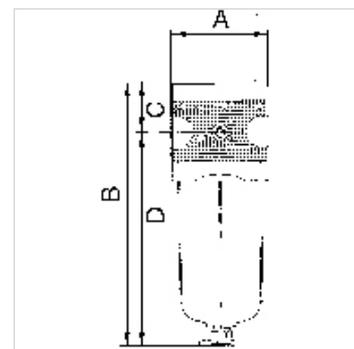

## Napomena

Drugi podatci na zahtjev.

## Opis

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

## Artikli

| Naziv          | Navoj | Protok (L/min) | A (mm) | B        | C (mm) | D (mm) | DN | Veličina |
|----------------|-------|----------------|--------|----------|--------|--------|----|----------|
| K- 07 25 10 49 | G 1/4 | 380            | 47,8   | 137,0 mm | 27,0   | 110,0  | 6  | 1        |
| K- 07 25 10 52 | G 1/2 | 1500           | 68,8   | 168,2 mm | 34,5   | 133,7  | 15 | 2        |

## Rezervni dijelovi

|                                  |                           |
|----------------------------------|---------------------------|
| K-HALTERBAUSATZ MULTIFIX         | Holder                    |
| K-KOPPELPAKET MEHR               | Coupling packet           |
| K-KOPPELPAKET SCHMA              | Coupling packet           |
| K-PC-BEHAELTER FILTER MULTIFIX   | Polycarbonate tank filter |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler          |