
# K-XV ARG-K MS NI


Double nipples, conical male thread - nickel-plated brass

HANSA-FLEX

## Karakteristike

| | |
|---|---|
| **Radna temperatura** | Max. 150 °C |
| **Tlak** | Max. 60 bar |
| **Materijal** | poniklani mjed |



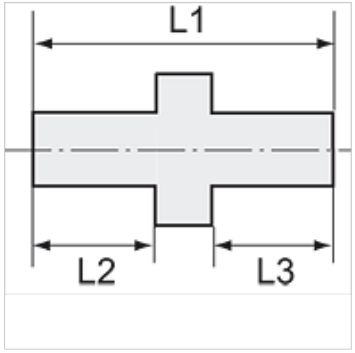


## Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatci na zahtjev.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikl

| Naziv | Navoj 1 | Navoj 2 | L1 (mm) | L2 (mm) | L3 (mm) | SW (veličina ključa) |
|---|---|---|---|---|---|---|
| **K- 07 40 12 60** | R 1/8 | R 1/8 | 21,0 | 8,0 | 8,0 | 12 mm |
| **K- 07 40 12 61** | R 1/8 | R 1/4 | 24,0 | 11,0 | 8,0 | 14 mm |
| **K- 07 40 12 62** | R 1/8 | R 3/8 | 25,0 | 11,5 | 8,0 | 17 mm |
| **K- 07 40 12 63** | R 1/4 | R 1/4 | 27,0 | 11,0 | 11,0 | 14 mm |
| **K- 07 40 12 64** | R 1/4 | R 3/8 | 28,0 | 11,5 | 11,0 | 17 mm |
| **K- 07 40 12 65** | R 1/4 | R 1/2 | 32,0 | 14,0 | 11,0 | 22 mm |
| **K- 07 40 12 66** | R 3/8 | R 3/8 | 29,0 | 11,5 | 11,5 | 17 mm |
| **K- 07 40 12 67** | R 3/8 | R 1/2 | 32,5 | 14,0 | 11,5 | 22 mm |
| **K- 07 40 12 68** | R 1/2 | R 1/2 | 35,0 | 14,0 | 14,0 | 22 mm |
| **K- 07 40 12 69** | R 1/2 | R 3/4 | 37,0 | 16,5 | 14,0 | 27 mm |
| **K- 07 40 12 71** | R 3/4 | R 3/4 | 40,0 | 16,5 | 16,5 | 27 mm |
| **K- 07 40 12 70** | R 3/4 | R 1 | 42,5 | 19,0 | 16,5 | 34 mm |
| **K- 07 40 12 72** | R 1 | R 1 | 45,5 | 19,0 | 19,0 | 34 mm |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*