


# K-BKR MINI SAFETY

Mini safety ball valves, non-lockable, with relief port - SAFETY

**HANSA FLEX**

## Karakteristike

|                   |                                |
|-------------------|--------------------------------|
| Radni tlak        | 0.99 - 20 bar                  |
| Radna temperatura | -20 °C to max. +80 °C          |
| Odzračni provrt   | 2,5                            |
| Opis navoja       | G thread acc. DIN EN ISO 228-1 |
| Ručka             | PA 66                          |
| Brtva kugle       | PTFE                           |
| Brtva vretena     | NBR                            |
| Materijal         | poniklani mjed                 |

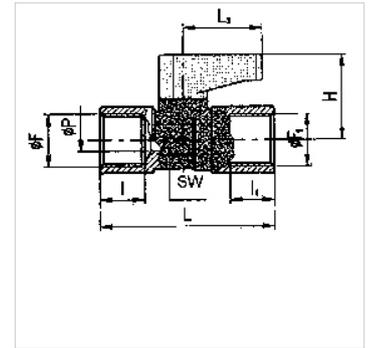

## Napomena

Drugi podatci na zahtjev.

## Artikli

| Naziv          | DN | Navoj        | H<br>(mm) | L<br>(mm) | L1<br>(mm) | SW<br>(mm) |
|----------------|----|--------------|-----------|-----------|------------|------------|
| K- 07 30 20 10 | 6  | G 1/8 female | 21,0      | 35,0      | 19,0       | 14         |
| K- 07 30 20 11 | 6  | G 1/4 female | 21,0      | 37,0      | 19,0       | 14         |
| K- 07 30 20 12 | 8  | G 3/8 female | 21,0      | 42,0      | 19,0       | 18         |