


K-WTST SAFETY BK SCHA AN HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and 2-piece service unit

HANSA FLEX

Karakteristike

| | |
|--|---|
| Ulazni tlak | 2.5 - 16 bar |
| Izlazni tlak | 0.5 - 8 bar |
| Temperaturno područje | -10 °C to +50 °C |
| Mediji | komprimirani zrak |
| Brtveni materijal | NBR |
| Navoj priključka | Material: Die-cast zinc |
| Spremnik | Polycarbonate (with bayonet lock) and bowl guard |
| Filtarski element | Cellpor (PE) 5 µm |
| Kućiče | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Vlastita potrošnja zraka | Max. 1.5 l/min (depending on secondary pressure) |
| Mjerenje vrijednosti protoka | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| Priključak za odzračivanje Kuglasti ventil | Silencer |

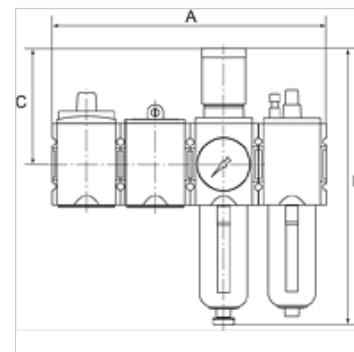

Napomena

Drugi podatci na zahtjev.

Opis

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

Napomene uz narudžbu

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

Artikli

| Naziv | Navoj | Protok (L/min) | A (mm) | B | C (mm) | Ispust kondenzata |
|----------------|-------|----------------|--------|----------|--------|-------------------|
| K- 07 25 15 38 | G 1/4 | 1750 | 208,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 15 39 | G 3/8 | 1750 | 208,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 15 40 | G 3/8 | 3500 | 252,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 15 41 | G 1/2 | 3500 | 252,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 15 42 | G 3/4 | 10000 | 340,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 15 43 | G 1 | 10000 | 340,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 15 44 | G 1/4 | 1750 | 208,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 15 45 | G 3/8 | 1750 | 208,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 15 46 | G 3/8 | 3500 | 252,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 15 47 | G 1/2 | 3500 | 252,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 15 48 | G 3/4 | 10000 | 340,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 15 49 | G 1 | 10000 | 340,0 | 343,0 mm | 137,0 | Auto |

Pribor

| | |
|--------------------|----------|
| K-STECKSCHLOSS | Key lock |
| K-VORHAENGESCHLOSS | Padlock |