


# K-DRG DRV 250 NIEDERDRUCK

DRV 250 pressure regulators, low-pressure type

**HANSA FLEX**

## Karakteristike

|                       |   |
|-----------------------|---|
| Ulazni tlak           | Max. 25 bar (Series 200 and 300 Series), Max. 40 bar (400 Series)     |
| Temperaturno područje | Max. 75 °C  |
| Redukcijski omjer     | Max. 10:1 (200 Series), Max. 20:1 (300 Series), Max. 6:1 (400 Series) |
| Brtveni materijal     | NBR   |
| Pokrov s oprugom      | Pressed brass up to DN 25, Grey cast iron from DN 32                  |
| Kućiče                | Red brass 2.1096.01   |

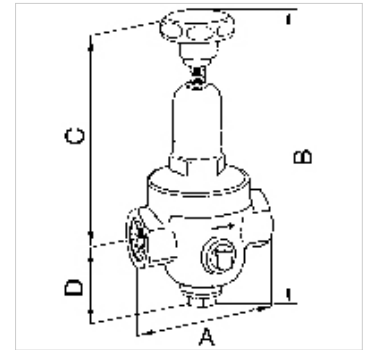

## Napomena

Drugi podatci na zahtjev.

## Opis

Diaphragm pressure regulators with non-self-relieving design and non-pressure-reduced single-seated valve. Very precise adjustment. Good response characteristic because of only a few moving parts which hence minimal friction. Ideal for compressed air, nitrogen and other neutral, non-flammable gases, but only suitable for liquids with comparatively low flow rates.

## Napomene uz narudžbu

Ostale izvedbe na zahtjev

## Dodatne informacije

Druge izvedbe na zahtjev

## Artikl

| Naziv          | Navoj | Regulacijsko područje | Protok, kvs-vrijednost (m <sup>3</sup> /h) | A (mm) | B        | C (mm) | D (mm) |
|----------------|-------|-----------------------|--|--------|----------|--------|--------|
| K- 07 25 04 94 | G 1/4 | 0.2 - 2 bar           | 0,5  | 70,0   | 185,5 mm | 140,0  | 45,5   |
| K- 07 25 04 95 | G 3/8 | 0.2 - 2 bar           | 0,6  | 70,0   | 185,5 mm | 140,0  | 45,5   |
| K- 07 25 04 96 | G 1/2 | 0.2 - 2 bar           | 1,2  | 85,0   | 232,5 mm | 186,0  | 46,5   |

## Rezervni dijelovi

K-VERSCHLEI-SATZ Set of wearing parts