K-DRG DRV 225 HOCHDRUCK


DRV 225 pressure regulators, high-pressure type

HANSA-FLEX

Karakteristike

Ulazni tlak	Max. 25 bar (Series 200 and 300 Series), Max. 40 bar (400 Series)
Temperaturno područje	Max. 75 °C
Redukcijski omjer	Max. 10:1 (200 Series), Max. 20:1 (300 Series), Max. 6:1 (400 Series)
Brtveni materijal	NBR
Pokrov s oprugom	Pressed brass up to DN 25, Grey cast iron from DN 32
Kućište	Red brass 2.1096.01



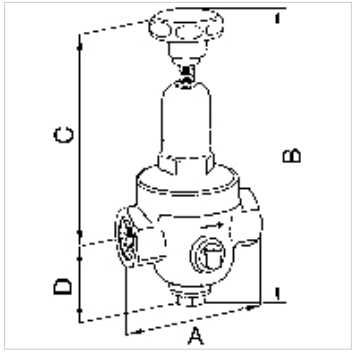

Napomena

Drugi podatci na zahtjev.

Opis

Diaphragm pressure regulators with non-self-relieving design and non-pressure-reduced single-seated valve. Very precise adjustment. Good response characteristic because of only a few moving parts which hence minimal friction. Ideal for compressed air, nitrogen and other neutral, non-flammable gases, but only suitable for liquids with comparatively low flow rates.

Napomene uz narudžbu

Ostale izvedbe na zahtjev

Dodatne informacije

Druge izvedbe na zahtjev

Artikl

Naziv	Navoj	Regulacijsko područje	Protok, kvs-vrijednost (m3/h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 97	G 1/4	1.5 - 20 bar	0,5	70,0	188,0 mm	141,0	47,0
K- 07 25 04 98	G 3/8	1.5 - 20 bar	0,6	70,0	188,0 mm	141,0	47,0
K- 07 25 04 99	G 1/2	1.5 - 20 bar	1,2	85,0	228,5 mm	182,0	46,5
K- 07 25 05 00	G 3/4	1.5 - 20 bar	1,3	85,0	228,5 mm	182,0	46,5
K- 07 25 05 01	G 1	1.5 - 20 bar	1,6	95,0	257,0 mm	201,0	56,0
K- 07 25 05 02	G 1 1/4	1.5 - 20 bar	4,2	104,0	385,0 mm	324,0	61,0
K- 07 25 05 03	G 1 1/2	1.5 - 20 bar	4,5	108,0	392,0 mm	331,0	61,0
K- 07 25 05 04	G 2	1.5 - 20 bar	7,2	146,5	419,0 mm	349,0	70,0

Rezervni dijelovi

K-VERSCHLEI-SATZ	Set of wearing parts

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.