
# K-X-STECKVERBINDUNG 1

X-unions

## Karakteristike

| | |
|---|---|
| **Radni tlak** | Max. 16 bar |
| **Radna temperatura** | -20 °C to +80 °C |
| **Materijal** | poniklani mjed |
| **Pritisni prsten** | Hostaform |
| **Stezni prsten** | Stainless steel |



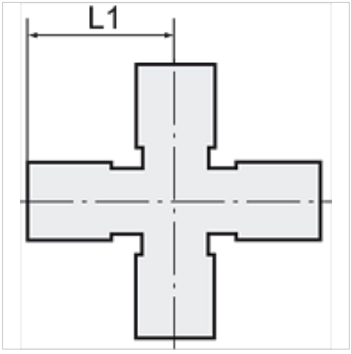


## Napomena

Drugi podatci na zahtjev.

## Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikl

| Naziv | za vanjski Ø crijeva | L1 (mm) |
|---|---|---|
| **K- 07 40 47 29** | 4 mm | 18,6 |
| **K- 07 40 47 30** | 6 mm | 21,9 |
| **K- 07 40 47 31** | 8 mm | 25,4 |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*