



K-XRD STECKANSCHLUSS Z GEW AGR-K BE

Straight non-return valves, flow direction from tube to port, conical male thread, coated

HANSA FLEX

Karakteristike

| | |
|-----------------------|--|
| Radni tlak | Max. 10 bar, vacuum |
| Područje primjene | Air, vacuum |
| preporučena crijeva | PU or PA (nylon) |
| Mediji | komprimirani zrak |
| Norma | R thread acc. to ISO 7-1, thread coating |
| Temperaturno područje | 0 °C to +60 °C |
| Brtvena površina | Conical version: thread coating |
| Materijal | Plastic, Nickel plated brass |
| Pritisni prsten | Plastic |

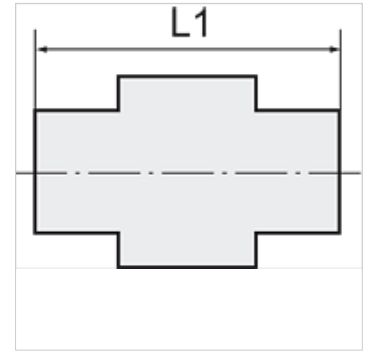

Napomena

Drugi podatci na zahtjev.

Opis

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Artikli

| Naziv | Navoj | za vanjski Ø crijeva | L1 (mm) | Tlak otvaranja (bar) | SW (veličina ključa) |
|----------------|-------|----------------------|---------|----------------------|----------------------|
| K- 07 40 08 97 | R 1/8 | 4 mm | 24,0 | 0,2 | 10 mm |
| K- 07 40 08 98 | R 1/8 | 6 mm | 31,0 | 0,2 | 12 mm |
| K- 07 40 08 99 | R 1/8 | 8 mm | 32,8 | 0,2 | 14 mm |
| K- 07 40 08 95 | R 1/4 | 6 mm | 33,0 | 0,2 | 14 mm |
| K- 07 40 08 96 | R 1/4 | 8 mm | 34,8 | 0,2 | 14 mm |
| K- 07 40 09 00 | R 3/8 | 10 mm | 41,0 | 0,2 | 17 mm |
| K- 07 40 09 01 | R 3/8 | 12 mm | 42,5 | 0,2 | 21 mm |
| K- 07 40 08 93 | R 1/2 | 10 mm | 43,0 | 0,2 | 21 mm |
| K- 07 40 08 94 | R 1/2 | 12 mm | 44,5 | 0,2 | 21 mm |