# K-ZFL ABSP-KLAPPEN EINFACH


Butterfly valves, with single-acting actuator - spring to close, min. pilot pressure 5 bar

HANSA FLEX

## Karakteristike

| | |
|---|---|
| **Izvedba** | Pneumatic actuators, in double- or single acting version |
| **Radni tlak** | Max. 16 bar |
| **Radna temperatura** | -15 °C to +120 °C |
| **Mediji** | Water / steam, salt water, salt water, ester, ketone, alkali, caustic soda, sodium hydroxide. Not recommended for hydrocarbons |
| **Upravljački tlak** | 5.5 bar |
| **Ventilski adapter** | Supplied as standard, operated by a 3/2- or 5/2-way valve |
| **Zakretni kut** | 90 ° |
| **Pogon** | aluminium eloxed |
| **Brtva pogona** | NBR |
| **Kućište** | Grey cast iron GG25 epoxy resin coated, RAL 5015 |
| **Brtva** | EPDM |
| **Vratilo** | SS416 |
| **Valovita brtva** | EPDM |
| **Aktiviranje** | |



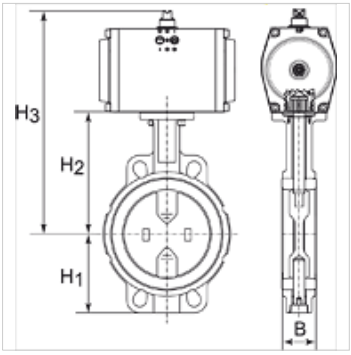


## Napomena

Drugi podatci na zahtjev.

## Artikl

| Naziv | Pločica | DN | B (mm) | H1 (mm) | H2 (mm) | H3 (mm) | L (mm) |
|---|---|---|---|---|---|---|---|
| **K- 07 30 03 36** | Stainless Steel CF8M/1.4404 | 40 | 38,0 | 68,0 | 108,0 | 238,0 | 94,0 |
| **K- 07 30 03 37** | Stainless Steel CF8M/1.4404 | 50 | 47,0 | 71,0 | 143,0 | 273,0 | 100,0 |
| **K- 07 30 03 38** | Stainless Steel CF8M/1.4404 | 65 | 49,0 | 78,0 | 155,0 | 285,0 | 115,0 |
| **K- 07 30 03 39** | Stainless Steel CF8M/1.4404 | 80 | 47,0 | 89,0 | 162,0 | 292,0 | 127,0 |
| **K- 07 30 03 40** | Stainless Steel CF8M/1.4404 | 100 | 56,0 | 102,0 | 178,0 | 348,0 | 163,0 |
| **K- 07 30 03 42** | Stainless Steel CF8M/1.4404 | 125 | 59,0 | 123,0 | 191,0 | 361,0 | 190,0 |
| **K- 07 30 03 44** | Stainless Steel CF8M/1.4404 | 150 | 59,0 | 138,0 | 265,0 | 395,0 | 216,0 |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*