


# K-VT 2 ABGAENGE G-MINI

Manifolds

**HANSA FLEX**

## Karakteristike

|                    |                        |
|--------------------|------------------------|
| Ulazni tlak        | 0 - 9 bar              |
| Temperatura medija | max. 70 °C             |
| Okolna temperatura | Max. 70 °C             |
| Kućište            | Die-cast aluminium     |
| Drugi podatci      | User manual on request |

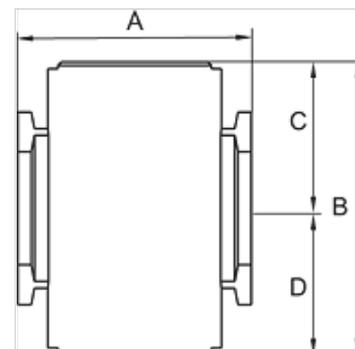

## Artikl

| Naziv          | Navoj | A<br>(mm) | B       | C<br>(mm) | D<br>(mm) | Veličina |
|----------------|-------|-----------|---------|-----------|-----------|----------|
| K- 07 25 12 31 | G 1/8 | 28,5      | 36,0 mm | 18,0      | 18,0      | 200      |
| K- 07 25 12 32 | G 1/4 | 28,5      | 36,0 mm | 18,0      | 18,0      | 200      |

## Pribor

|                      |                 |
|----------------------|-----------------|
| K-VERBINDUNGELEMENTE | Connecting sets |
| K-WANDHALTER         | Wall bracket    |