
K-T-RED VERBINDER POM

Union tees, unequal

Karakteristike

Radni tlak	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Radna temperatura	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Materijal	Acetalpolymerisat (POM)
Brtveni materijal	NBR



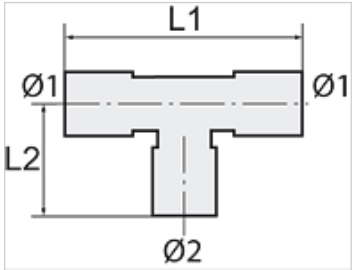

Napomena

Drugi podatci na zahtjev.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikl

Naziv	za vanjski Ø crijeva 1 (mm)	za vanjski Ø crijeva 2 (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 74	18	15	87,0	40,0
K- 07 40 28 75	22	15	90,0	42,0

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.