
# K-STECKVERBINDU RED VA

Reducers

## Karakteristike

| | |
|---|---|
| **Radni tlak, pulsirajući** | Max. 10 bar |
| **Tlak** | Max. 15 bar (depending on pipe quality) |
| **prikladan materijal za cijevi** | PVDF, PTFE, stainless steel, PA, PU |
| **Okolna temperatura** | -20 °C to max. +150 °C (depending on pipe quality and diameter) |
| **Materijal** | Oplemenjeni čelik 1.4404 |
| **Brtveni materijal** | FKM |



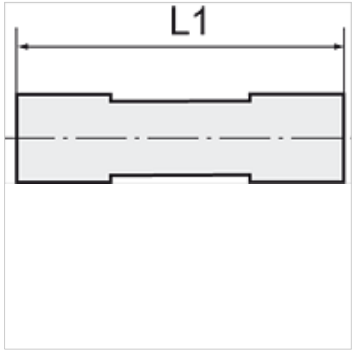


## Napomena

Drugi podatci na zahtjev.

## Opis

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Artikl

| Naziv | za vanjski Ø crijeva | L1 (mm) |
|---|---|---|
| **K- 07 40 46 78** | 6 mm / 4 mm | 31,0 |
| **K- 07 40 46 79** | 8 mm / 6 mm | 34,0 |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*