


# K-W90 AG-K ISO 7-1 VA

Male elbows, conical male thread acc. to ISO 7-1, stainless steel

**HANSA FLEX**

## Karakteristike

|                       |  |
|-----------------------|--|
| Područje tlaka        | Max. 25 bar  |
| preporučena crijeva   | PTFE hose  |
| Temperaturno područje | -40 °C to +200 °C (depending on the hose quality and diameter) |
| Materijal             | Oplemenjeni čelik 1.4404                                       |
| Brtva                 | Pure metal   |

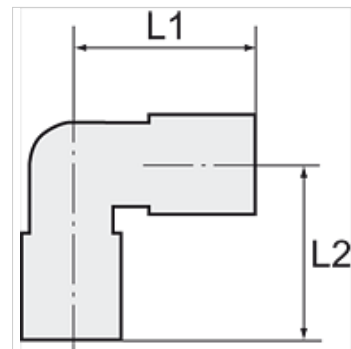

## Napomena

Drugi podatci na zahtjev.

## Opis

Supplied without seals. For use with corrosive media and at high temperatures. Screw fitting series made of stainless steel for all applications where compliance with strict tightness, pressure and temperature requirements is essential. The parts are manufactured without rubber seals, in other words they are ideal for very high temperatures or for use with corrosive liquids, e.g. in cases when FPM is no longer suitable.

## Artikl

| Naziv          | Navoj | za crijevo   | L1<br>(mm) | L2<br>(mm) | SW1<br>(mm) | SW2<br>(mm) |
|----------------|-------|--------------|------------|------------|-------------|-------------|
| K- 07 40 30 32 | R 1/8 | 6 mm / 4 mm  | 23,0       | 17,0       | 12          | 10          |
| K- 07 40 30 33 | R 1/8 | 8 mm / 6 mm  | 23,0       | 17,0       | 14          | 10          |
| K- 07 40 30 30 | R 1/4 | 6 mm / 4 mm  | 23,0       | 21,5       | 12          | 10          |
| K- 07 40 30 31 | R 1/4 | 8 mm / 6 mm  | 23,0       | 21,5       | 14          | 10          |
| K- 07 40 30 29 | R 1/4 | 10 mm / 8 mm | 26,0       | 21,5       | 16          | 12          |