



K-DRG TRINKWASSER DVGW N EN 1567

Pressure regulators for drinking water, DVGW-tested acc. to EN 1567

HANSA FLEX

Karakteristike

Ulazni tlak	Max. 16 bar
Predtlak	Min. 2.5 bar
min. pad tlaka	1 bar
Radna temperatura	Max. 75 °C
Brtve	NBR-SBR
Pokrov s oprugom	PA 6 (up to DN 32), grey cast iron (from DN 40)
Kučište	Bronze (Rg5)
Unutarnji dijelovi	Plastic, brass, stainless steel
Membrana	NBR
Drugi podatci	DVGW Zertifikat

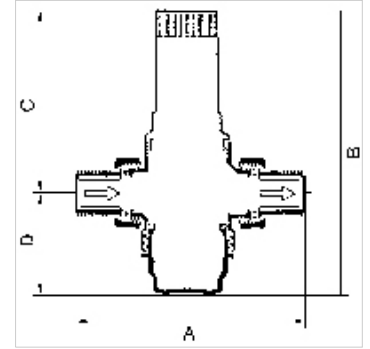

Napomena

Drugi podatci na zahtjev.

Opis

Pressure regulator with pressure-reduced single-seated diaphragm valve and built-in strainer. Specially designed for use in domestic water installations. R 1/2 to R 1 1/4 port sizes are DVGW-tested according to EN 1567.
Regulators with an R 1 1/2 or R 2 port are not DVGW approved. The device is also suitable for all other applications involving water, neutralnon-sticky liquids, air and neutral non-flammable gases.

Artikli

Naziv	Navoj	DN	Regulacijsko područje	Protok, kvs-vrijednost (m ³ /h)	A (mm)	B (mm)	C (mm)	D (mm)
K- 07 25 04 39	R 1/2	15	1.5 - 6 bar	2,9	137,0	131,0 mm	104,0	27,0
K- 07 25 04 40	R 3/4	20	1.5 - 6 bar	3,9	141,0	136,6 mm	109,0	27,6
K- 07 25 04 41	R 1	25	1.5 - 6 bar	5,4	161,0	136,3 mm	107,0	29,3
K- 07 25 04 42	R 1 1/4	32	1.5 - 6 bar	6,1	177,0	151,5 mm	109,0	42,5
K- 07 25 04 43	R 1 1/2	40	1.5 - 6 bar	9,0	210,0	294,0 mm	243,0	51,0
K- 07 25 04 44	R 2	50	1.5 - 6 bar	13,0	210,0	294,0 mm	241,0	53,0

Pribor

K-KARTUSCHEN Cartridge