

# K-RD NIPPEL AGRK IGR MS NI

Reducing nipples, conical male thread, parallel female thread - nickel-plated brass


**HANSA FLEX**

## Karakteristike

Radna temperatura Max. 150 °C

Tlak Max. 60 bar

Materijal poniklani mjed

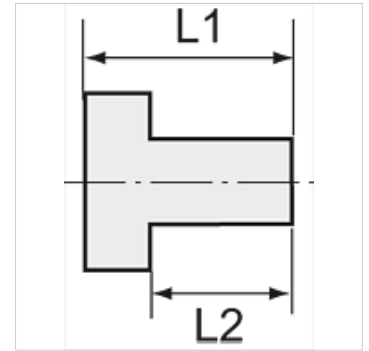

## Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Drugi podatci na zahtjev.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikli

| Naziv          | Vanjski navoj | Unutarnji navoj | L1 (mm) | L2 (mm) | SW (veličina ključa) |
|----------------|---------------|-----------------|---------|---------|----------------------|
| K- 07 40 15 66 | R 1/4         | G 1/8           | 16,0    | 11,0    | 14 mm                |
| K- 07 40 15 67 | R 3/8         | G 1/8           | 17,0    | 11,5    | 17 mm                |
| K- 07 40 15 68 | R 3/8         | G 1/4           | 17,0    | 11,5    | 17 mm                |
| K- 07 40 15 69 | R 1/2         | G 1/8           | 19,5    | 14,0    | 22 mm                |
| K- 07 40 15 70 | R 1/2         | G 1/4           | 20,0    | 14,0    | 22 mm                |
| K- 07 40 15 71 | R 1/2         | G 3/8           | 20,0    | 14,0    | 22 mm                |
| K- 07 40 15 72 | R 3/4         | G 3/8           | 23,0    | 16,5    | 27 mm                |
| K- 07 40 15 73 | R 3/4         | G 1/2           | 23,0    | 16,5    | 27 mm                |
| K- 07 40 15 74 | R 1           | G 1/2           | 25,0    | 16,0    | 34 mm                |
| K- 07 40 15 75 | R 1           | G 3/4           | 25,0    | 18,0    | 34 mm                |