# K-BKR SCHW STAHLHEBEL IG AG


Ball valves with black steel lever, lighweight type, female/male thread

HANSA-FLEX

## Karakteristike

| | |
|---|---|
| **Područje primjene** | Compressed air, water, non-toxic and non-corrosive gases, heating systems, agriculture |
| **Radni tlak** | Max. 40 bar |
| **Radna temperatura** | -15 °C to +90 °C |
| **Opis navoja** | G thread acc. DIN EN ISO 228-1 |
| **Kućište** | Nickel-plated brass |
| **Poluga** | Steel, with plastic coating |
| **Kugla** | Chrome-plated brass |
| **Brtva kugle** | PTFE |
| **Brtva vretena** | HNBR / EPDM / PTFE. 2 O-Rings (HNBR / EPDM)<br>1 gasket (PTFE)<br>additional PTFE-gasket |



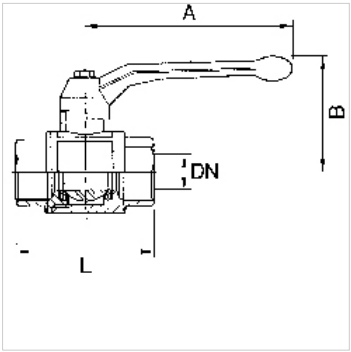


## Napomena

Drugi podatci na zahtjev.

## Artikl

| Naziv | DN | Navoj | A (mm) | B (mm) | L (mm) |
|---|---|---|---|---|---|
| **K- 07 30 00 51** | 8 | G 1/4 | 85,0 | 42,0 | 44,0 |
| **K- 07 30 00 55** | 10 | G 3/8 | 85,0 | 42,0 | 51,0 |
| **K- 07 30 00 59** | 15 | G 1/2 | 85,0 | 46,0 | 60,0 |
| **K- 07 30 00 63** | 20 | G 3/4 | 105,0 | 53,0 | 70,0 |
| **K- 07 30 00 67** | 25 | G 1 | 105,0 | 57,0 | 79,0 |
| **K- 07 30 00 71** | 32 | G 1 1/4 | 130,0 | 70,0 | 91,0 |
| **K- 07 30 00 75** | 40 | G 1 1/2 | 130,0 | 76,0 | 104,0 |
| **K- 07 30 00 79** | 50 | G 2 | 165,0 | 92,0 | 122,0 |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*