
# K-SVKM NW 7,2 ABSP TUE MS

Quick disconnect couplings DN 7.2, both sides sealing, brass, with hose stem

## Karakteristike

| | |
|---|---|
| **Radni tlak** | 0 - 35 bar, maximum static working pressure (non-pulsating) |
| **Protok zraka** | 700 l/min (at 6 bar and Δp = 0.5 bar) |
| **Temperatura medija** | -20 °C to +100 °C |
| **Kućište, čahura, tijelo ventila** | Brass |
| **Opruga, razorni prsten, kugle** | Stainless steel |
| **Brtveni materijal** | NBR |

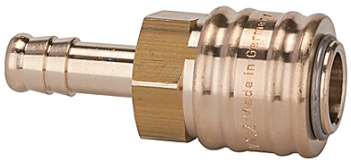

## Napomena

Drugi podatci na zahtjev.

## Opis

Couplings, stems and plugs are fitted with a valve. Connection: Both valves open and the medium is allowed to pass. Disconnection: Both valves close and the medium is prevented from escaping.

## Artikl

| Naziv | Priključak | Duljina (mm) | SW (mm) |
|---|---|---|---|
| **K- 07 35 07 56** | Stem, I.D. 6 | 58,0 | 21 |
| **K- 07 35 12 72** | Stem, I.D. 8 | 58,0 | 21 |
| **K- 07 35 07 57** | Stem, I.D. 9 | 58,0 | 21 |
| **K- 07 35 12 74** | Stem, I.D. 10 | 58,0 | 21 |
| **K- 07 35 07 58** | Stem, I.D. 13 | 58,0 | 21 |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*