


# K-WV 5/2 BEIDS PNEU

5/2-way spool valves, double pneumatic

## Karakteristike

<b>Funkcija</b>	5/2-way
<b>Radni tlak</b>	2.5 - 10 bar; Max. vacuum 10 bar (external pilot air)
<b>min. radni tlak</b>	2,5 bar
<b>Temperaturno področje</b>	-10 °C to +60 °C
<b>Protok 6bar i 10bar</b>	1500 NI/min (G 1/4), 4600 NI/min (G 1/2)
<b>Električni priključak</b>	Coupler plug PG 9 - form B
<b>Vrsta zaščite</b>	IP 65 (DIN 46244)
<b>Kućište</b>	Anodised aluminium, blue
<b>Klizlač klipa</b>	Stainless steel
<b>Brtveni materijal</b>	NBR

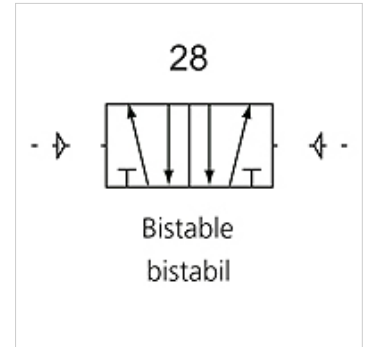

## Napomena

Drugi podatki na zahtjev.

## Opis

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

## Artiki

Naziv	Priključak	DN	Br. spojne sheme	Upravljanje
K- 07 15 02 19	G 1/4	8	28	
K- 07 15 02 20	G 1/2"	15	28	