


K-PRAEZIONS STEUERREGLER

Precision pilot regulators (feedback)

HANSA FLEX

Karakteristike

| | |
|--------------------------|-----------------------|
| Ulazni tlak | Max. 16 bar |
| Temperatura medija | max. 80 °C |
| Okolna temperatura | Max. 80 °C |
| Priključak za manometar | For feedback pressure |
| Brtveni materijal | FKM |
| Kućište | Die-cast zinc |
| Membrana | FKM |
| Vlastita potrošnja zraka | 3 to 6 l/min |

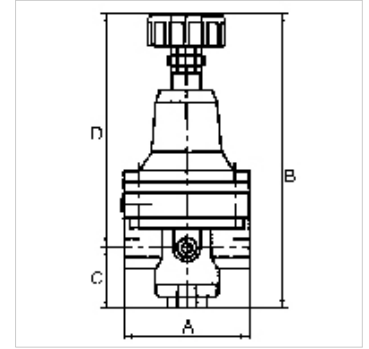

Napomena

Drugi podatci na zahtjev.

Opis

Diaphragm pressure regulator for feedback systems, specially designed for use in a pneumatically controlled closed control loop in combination with a pressure regulator with pneumatic remote control, e.g. our Art. Nos. K-07250505 to K-07250510.

Artikli

| Naziv | Navoj | Regulacijsko područje | A (mm) | B | C (mm) | D (mm) |
|----------------|-------|-----------------------|-----------|----------|-----------|-----------|
| K- 07 25 05 11 | G 1/4 | 0.2 - 7 bar | 82,0 | 142,8 mm | 19,4 | 123,4 |

Pribor

K-HALTERBAUSATZ STANDARD Holder