
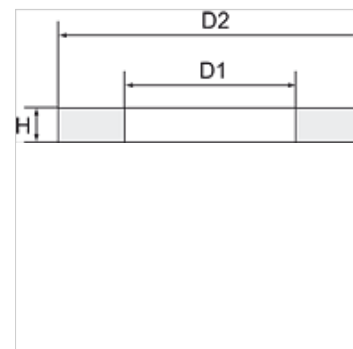


K-DICHTRING PVC

Captive seals, PVC, max. temperature 70 °C

HANSA FLEX



Napomena

Drugi podatci na zahtjev.

Napomene uz narudžbu

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Artikli

Naziv	za navoje	D1 (mm)	D2 (mm)	H (mm)
K- 07 10 03 23	M 5	5,0	8,0	1,2
K- 07 10 03 27	G 1/2	21,0	25,4	2,0
K- 07 10 03 25	G 1/4	13,1	17,9	1,8
K- 07 10 03 26	G 3/8	16,8	21,4	1,8
K- 07 10 03 29	G 1	33,4	40,0	2,0
K- 07 10 03 28	G 3/4	26,6	32,0	2,0
K- 07 10 03 24	G 1/8	9,9	13,9	1,8