


K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

HANSA FLEX

Karakteristike

Mediji	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Radni tlak	Max. 10 bar
Proradni tlak	0,6 bar (Ø 20 bis Ø 32), 0,4 bar (Ø 40 bis Ø 100)
Temperaturno področje	-10 °C to +60 °C (Ø 20 to Ø 63) -10 °C to +80 °C (Ø 80 bis Ø 100)
Klipnjača	C45 steel, hard chrome-plated
Cijev	Anodised aluminium jacket with T-slots
Klip	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 100)
Brtveni materijal	NBR

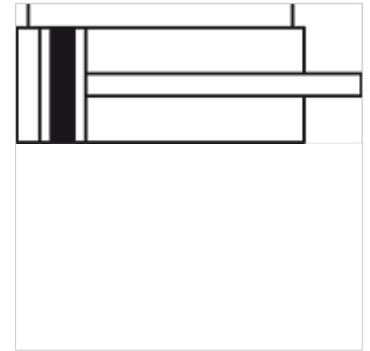

Napomena

Drugi podatci na zahtjev.

Opis

New series acc. to ISO 21287 characterised by a very short and compact design. The standard type features a magnetic piston. Piston rod optionally with male or female thread.

Artikli

Naziv	Ø klipa	Hod (mm)	Priključak	Vanjski navoj klipnjače
K- 07 15 08 09	20 mm	5	M 5	M 8
K- 07 15 08 10	20 mm	10	M 5	M 8
K- 07 15 08 11	20 mm	15	M 5	M 8
K- 07 15 08 12	20 mm	20	M 5	M 8
K- 07 15 08 13	20 mm	25	M 5	M 8
K- 07 15 08 14	20 mm	30	M 5	M 8
K- 07 15 08 15	20 mm	40	M 5	M 8
K- 07 15 08 16	20 mm	50	M 5	M 8
K- 07 15 08 17	20 mm	60	M 5	M 8
K- 07 15 08 18	25 mm	5	M 5	M 8
K- 07 15 08 19	25 mm	10	M 5	M 8
K- 07 15 08 20	25 mm	15	M 5	M 8
K- 07 15 08 21	25 mm	20	M 5	M 8
K- 07 15 08 22	25 mm	25	M 5	M 8
K- 07 15 08 23	25 mm	30	M 5	M 8
K- 07 15 08 24	25 mm	40	M 5	M 8
K- 07 15 08 25	25 mm	50	M 5	M 8
K- 07 15 08 26	25 mm	60	M 5	M 8
K- 07 15 08 27	32 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 28	32 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 29	32 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 30	32 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 31	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 32	32 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 33	32 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 34	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 35	32 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 36	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 37	40 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 38	40 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 39	40 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 40	40 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 41	40 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 42	40 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 43	40 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 44	40 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 45	40 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 46	40 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 47	50 mm	5	G 1/8	M 12 x 1.25

K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

HANSA FLEX

Artiki				
Naziv	Ø klipa	Hod (mm)	Priključak	Vanjski navoj klipnjače
K- 07 15 08 48	50 mm	10	G 1/8	M 12 x 1.25
K- 07 15 08 49	50 mm	15	G 1/8	M 12 x 1.25
K- 07 15 08 50	50 mm	20	G 1/8	M 12 x 1.25
K- 07 15 08 51	50 mm	25	G 1/8	M 12 x 1.25
K- 07 15 08 52	50 mm	30	G 1/8	M 12 x 1.25
K- 07 15 08 53	50 mm	40	G 1/8	M 12 x 1.25
K- 07 15 08 54	50 mm	50	G 1/8	M 12 x 1.25
K- 07 15 08 55	50 mm	60	G 1/8	M 12 x 1.25
K- 07 15 08 56	50 mm	80	G 1/8	M 12 x 1.25
K- 07 15 08 57	63 mm	5	G 1/8	M 12 x 1.25
K- 07 15 08 58	63 mm	10	G 1/8	M 12 x 1.25
K- 07 15 08 59	63 mm	15	G 1/8	M 12 x 1.25
K- 07 15 08 60	63 mm	20	G 1/8	M 12 x 1.25
K- 07 15 08 61	63 mm	25	G 1/8	M 12 x 1.25
K- 07 15 08 62	63 mm	30	G 1/8	M 12 x 1.25
K- 07 15 08 63	63 mm	40	G 1/8	M 12 x 1.25
K- 07 15 08 64	63 mm	50	G 1/8	M 12 x 1.25
K- 07 15 08 65	63 mm	60	G 1/8	M 12 x 1.25
K- 07 15 08 66	63 mm	80	G 1/8	M 12 x 1.25
K- 07 15 08 67	80 mm	5	G 1/8	M 16 x 1.5
K- 07 15 08 68	80 mm	10	G 1/8	M 16 x 1.5
K- 07 15 08 69	80 mm	15	G 1/8	M 16 x 1.5
K- 07 15 08 70	80 mm	20	G 1/8	M 16 x 1.5
K- 07 15 08 71	80 mm	25	G 1/8	M 16 x 1.5
K- 07 15 08 72	80 mm	30	G 1/8	M 16 x 1.5
K- 07 15 08 73	80 mm	40	G 1/8	M 16 x 1.5
K- 07 15 08 74	80 mm	50	G 1/8	M 16 x 1.5
K- 07 15 08 75	80 mm	60	G 1/8	M 16 x 1.5
K- 07 15 08 76	80 mm	80	G 1/8	M 16 x 1.5
K- 07 15 07 99	100 mm	5	G 1/8	M 16 x 1.5
K- 07 15 08 00	100 mm	10	G 1/8	M 16 x 1.5
K- 07 15 08 01	100 mm	15	G 1/8	M 16 x 1.5
K- 07 15 08 02	100 mm	20	G 1/8	M 16 x 1.5
K- 07 15 08 03	100 mm	25	G 1/8	M 16 x 1.5
K- 07 15 08 04	100 mm	30	G 1/8	M 16 x 1.5
K- 07 15 08 05	100 mm	40	G 1/8	M 16 x 1.5
K- 07 15 08 06	100 mm	50	G 1/8	M 16 x 1.5
K- 07 15 08 07	100 mm	60	G 1/8	M 16 x 1.5
K- 07 15 08 08	100 mm	80	G 1/8	M 16 x 1.5