
# K-ADA HUTPROFIL

Adapter for DIN rail

## Karakteristike

| | |
|---|---|
| **Mediji** | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **Radni tlak** | Max. vacuum 10 bar (external pilots), 3 to 7 bar (internal pilots as standard) |
| **Upravljački tlak** | 3 - 7 bar |
| **Temperaturno područje** | -10 °C to +60 °C |
| **Protok** | 200 Nl/min (Ø 4), 500 Nl/min (Ø 6), 800 Nl/min (Ø 8) |
| **Broj aktiviranja** | Max. 16 (e.g. 16 spring return valves) |
| **Pomoćno ručno aktiviranje** | Latching (bistable), Monostable (non-latching) version also available on request |
| **Potrošnja struje** | 0.6 W per pilot |
| **Vrsta zaštite** | IP 65 |

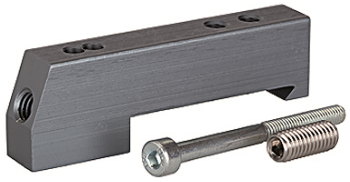

## Napomena

Drugi podatci na zahtjev.

## Opis

These compact valve terminals, with a maximum flow rate of 800 Nl/min, can be individually adapted to the specific conditions of each application thanks tot he wide range of functions and various input and intermediate plates.Since each valve terminal is a customer-specific combination of a series of individual elements, the catalogue only lists the available input, intermediate and end plates as well as the different valve discs and the 25-pin multi-pole connectors.

## Dodatne informacije

Important: The scope of supply does not include a connector. Please order separately.

## Artikl

| Naziv | Definicija |
|---|---|
| **K- 07 15 22 43** | Adapter for DIN rail |