
K-L-STECKVER L DREH AG OR

Male elbows, long, swivel type, parallel male thread with O-ring

Karakteristike

Radni tlak	Max. 15 bar, coarse vacuum
Područje primjene	Air, vacuum
preporučena crijeva	PU or PA (nylon)
Mediji	Compressed air and all gases or liquids that are compatible with the materials
Temperaturno područje	-20 °C to +80 °C
Brtvena površina	Parallel version: O-ring in housing
Materijal	Plastic, Nickel plated brass
Pritisni prsten	Plastic



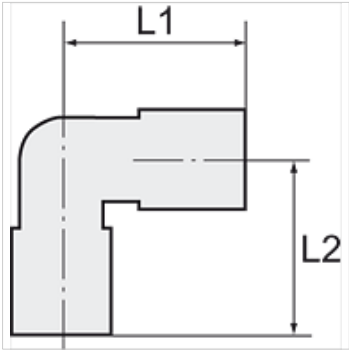

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikl

Naziv	Navoj	za vanjski Ø crijeva	L1 (mm)	L2 (mm)	SW (veličina ključa)
K- 07 40 01 76	M 5	4 mm	18,8	32,5	8 mm
K- 07 40 01 77	M 5	6 mm	20,0	33,5	8 mm
K- 07 40 01 90	G 1/8	4 mm	18,8	30,5	14 mm
K- 07 40 01 91	G 1/8	6 mm	20,0	31,5	14 mm
K- 07 40 01 92	G 1/8	8 mm	22,5	37,8	14 mm
K- 07 40 01 88	G 1/8	10 mm	26,9	45,4	17 mm
K- 07 40 01 89	G 1/8	12 mm	28,5	46,9	17 mm
K- 07 40 01 85	G 1/4	4 mm	18,8	30,5	17 mm
K- 07 40 01 86	G 1/4	6 mm	20,0	31,5	17 mm
K- 07 40 01 87	G 1/4	8 mm	22,5	33,8	17 mm
K- 07 40 01 83	G 1/4	10 mm	26,9	46,4	17 mm
K- 07 40 01 84	G 1/4	12 mm	28,5	47,9	17 mm
K- 07 40 01 96	G 3/8	6 mm	20,0	32,6	20 mm
K- 07 40 01 97	G 3/8	8 mm	22,5	34,9	20 mm
K- 07 40 01 93	G 3/8	10 mm	26,9	43,4	20 mm
K- 07 40 01 94	G 3/8	12 mm	28,5	44,9	20 mm
K- 07 40 01 95	G 3/8	16 mm	33,5	58,2	20 mm
K- 07 40 01 81	G 1/2	6 mm	20,0	33,3	24 mm
K- 07 40 01 82	G 1/2	8 mm	22,5	37,3	24 mm
K- 07 40 01 78	G 1/2	10 mm	26,9	45,3	24 mm
K- 07 40 01 79	G 1/2	12 mm	28,5	46,8	24 mm
K- 07 40 01 80	G 1/2	16 mm	33,5	54,9	24 mm

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.