
K-WTEH SERIE ONE M DRS

Service units, »ONE« Series, with pressure switch

Karakteristike

Ulazni tlak	Max. 10 bar
Temperaturno područje	-10 °C to +50 °C
Mediji	komprimirani zrak
Vrsta zaštite	IP 65
Radni tlak	0.5 - 8 bar
Tlačni prekidač	Changeover contact
Veličina pora u filtarskom elementu	20 µm
Mjerenje vrijednosti protoka	At 6,3 bar and Δp = 1 bar



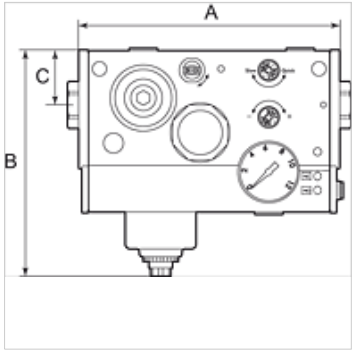

Napomena

Drugi podatci na zahtjev.

Opis

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

Napomene uz narudžbu

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Artikl

Naziv	Priključak	Protok (L/min)	A (mm)	B	C (mm)	Napon
K- 07 25 13 82	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 83	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 84	G 1/2	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.