
# K-T-STECK VERS DRE AG-K BE 1

Male branch tees, swivel type, conical male thread, coated

## Karakteristike

| | |
|---|---|
| **Radni tlak** | Max. 16 bar |
| **Radna temperatura** | -20 °C to +150 °C |
| **Materijal** | poniklani mjed |
| **Pritisni prsten** | Nickel-plated brass |
| **Stezni prsten** | Stainless steel |



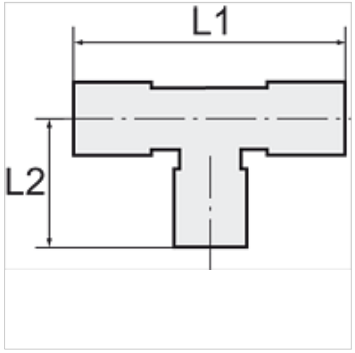


## Napomena

Drugi podatci na zahtjev.

## Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Artikl

| Naziv | Navoj | za vanjski Ø crijeva | L1 (mm) | L2 (mm) | SW (veličina ključa) |
|---|---|---|---|---|---|
| **K- 07 40 28 18** | R 1/8 | 4 mm | 40,0 | 20,0 | 13 mm |
| **K- 07 40 28 19** | R 1/8 | 6 mm | 43,0 | 20,0 | 13 mm |
| **K- 07 40 28 20** | R 1/8 | 8 mm | 47,0 | 20,0 | 13 mm |
| **K- 07 40 28 16** | R 1/4 | 6 mm | 43,0 | 25,0 | 14 mm |
| **K- 07 40 28 17** | R 1/4 | 8 mm | 47,0 | 25,0 | 14 mm |
| **K- 07 40 28 15** | R 1/4 | 10 mm | 53,0 | 26,0 | 16 mm |
| **K- 07 40 28 21** | R 3/8 | 8 mm | 47,0 | 28,0 | 18 mm |
| **K- 07 40 48 02** | R 3/8 | 10 mm | 53,0 | 30,0 | 18 mm |
| **K- 07 40 48 03** | R 3/8 | 12 mm | 58,0 | 32,5 | 20 mm |
| **K- 07 40 48 01** | R 1/2 | 12 mm | 58,0 | 35,5 | 22 mm |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*