

K-VSTO POM
Plugs

Karakteristike

Radni tlak	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Radna temperatura	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Materijal	Acetalpolymerisat (POM)
Brtveni materijal	NBR



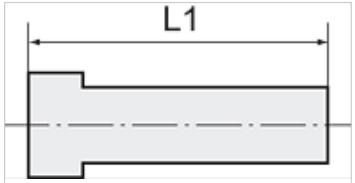

Napomena
Drugi podatci na zahtjev.

Opis
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikl

Naziv	Boja	L1 (mm)	Nastavak (mm)
K- 07 40 29 11	crvena	28,0	4
K- 07 40 29 12	crvena	28,0	5
K- 07 40 29 13	crvena	30,0	6
K- 07 40 29 14	crvena	31,0	8
K- 07 40 29 15	crvena	36,5	10
K- 07 40 29 16	crvena	38,5	12
K- 07 40 29 17	crna	45,0	15
K- 07 40 29 18	crna	41,5	18
K- 07 40 29 19	crna	45,0	22
K- 07 40 29 20	crna	56,0	28

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.