



K-STECKVERBINDU ST RED 1

Reducers with push-in plug

HANSA FLEX

Karakteristike

Radni tlak	Max. 16 bar
Radna temperatura	-20 °C to +150 °C
Materijal	poniklani mjed
Pritisni prsten	Nickel-plated brass
Stezni prsten	Stainless steel

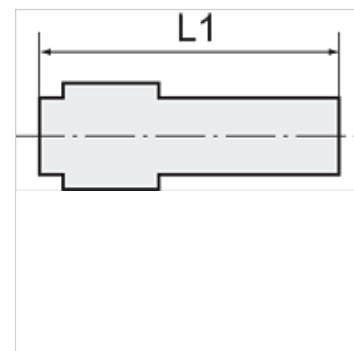

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikli

Naziv	za vanjski Ø crijeva	L1 (mm)	Utična nazuvica (mm)
K- 07 40 47 95	4 mm	29,5	6
K- 07 40 47 96	6 mm	32,5	8
K- 07 40 47 97	8 mm	38,5	10
K- 07 40 47 98	10 mm	41,0	12