

K-ODER-VENTIL
OR valves

Karakteristike

Radni tlak	2 - 10 bar
Temperaturno područje	-10 °C to +80 °C
Protok pri 6,3 bar i Δ 1 bar	500 Nl/min (G 1/8), 1300 Nl/min (G 1/4)
Tijelo ventila	aluminij
Kugla	Stainless steel
Brtve	NBR



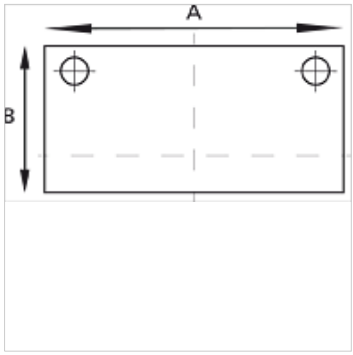

Napomena

Drugi podatci na zahtjev.

Opis

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Artikl

Naziv	Navoj	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.