



# K-KFE-BKR

KFE-ball valves

**HANSA FLEX**

## Karakteristike

|                                       |               |
|---------------------------------------|---------------|
| Radni tlak                            | maks. 10 bar  |
| Temperatura medija                    | max. +110 °C  |
| Tuljak                                | I.D. 13       |
| Ručka                                 | Die cast zinc |
| Kugla, brtva reznog prstena           | PTFE          |
| Brtva vretena, tuljak crljeva, kapica | EPDM          |

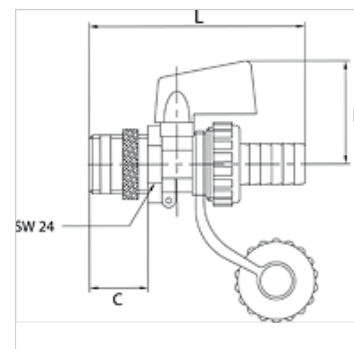

## Napomena

Drugi podatci na zahtjev.

## Opis

Boiler, filling and drain valves for heating systems.

## Artikli

| Naziv          | Navoj | B<br>(mm) | C<br>(mm) | L<br>(mm) | Materijal                       |
|----------------|-------|-----------|-----------|-----------|---------------------------------|
| K- 07 30 30 34 | G 1/2 | 37,0      | 20,0      | 74,6      | Brass with a bare metal surface |
| K- 07 30 30 35 | G 1/2 | 37,0      | 20,0      | 74,6      | Nickel-plated brass             |