


K-DRV ABLD RAENDEL DREH BESCH

Unidirectional flow control valves with outgoing air restriction, adjustable with knurled screw, angled, swivel type, conical male thread, coated

HANSA FLEX

Karakteristike

| | |
|-----------------------|--|
| Radni tlak | Max. 15 bar, coarse vacuum |
| Područje primjene | Air, vacuum |
| preporučena crijeva | PU or PA (nylon) |
| Mediji | Compressed air and all gases or liquids that are compatible with the materials |
| Temperaturno područje | -20 °C to +80 °C |
| Brtvena površina | Parallel version: O-ring in housing, Conical version: thread coating |
| Materijal | Plastic, Nickel plated brass |
| Pritisni prsten | Plastic |

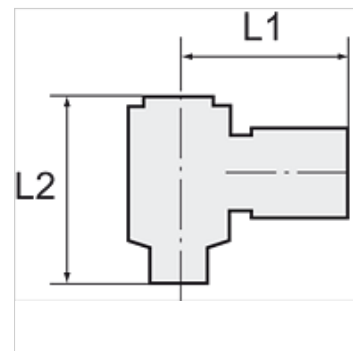

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikli

| Naziv | Navoj | za vanjski Ø crijeva | L1 (mm) | L2 min. (mm) | L2 maks. (mm) | SW (veličina ključa) |
|----------------|-------|----------------------|---------|--------------|---------------|----------------------|
| K- 07 40 07 32 | R 1/8 | 4 mm | 22,3 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 33 | R 1/8 | 6 mm | 22,9 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 34 | R 1/8 | 8 mm | 24,8 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 31 | R 1/8 | 10 mm | 30,1 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 28 | R 1/4 | 4 mm | 24,1 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 29 | R 1/4 | 6 mm | 24,9 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 30 | R 1/4 | 8 mm | 28,4 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 26 | R 1/4 | 10 mm | 32,0 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 27 | R 1/4 | 12 mm | 32,0 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 37 | R 3/8 | 6 mm | 26,6 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 38 | R 3/8 | 8 mm | 29,2 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 35 | R 3/8 | 10 mm | 32,5 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 36 | R 3/8 | 12 mm | 35,3 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 24 | R 1/2 | 6 mm | 29,6 | 53,0 | 59,2 | 24 mm |
| K- 07 40 07 25 | R 1/2 | 8 mm | 32,3 | 53,0 | 59,2 | 24 mm |
| K- 07 40 07 22 | R 1/2 | 10 mm | 35,5 | 53,0 | 59,2 | 24 mm |
| K- 07 40 07 23 | R 1/2 | 12 mm | 36,3 | 53,0 | 59,2 | 24 mm |