


# K-FI AK KOH PC-BEHAEL SI VARIOBLOC

Activated carbon filters with polycarbonate bowl and bowl guard

**HANSA FLEX**

## Karakteristike

|                              |  |
|------------------------------|--|
| Ulazni tlak                  | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Temperatura medija           | max. 50 °C   |
| Okolna temperatura           | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl)   |
| Kvaliteta zraka ISO 85731    | Class 1 dirt, class 1 oil                                  |
| Sadržaj preostalog ulja      | 0,003 mg/m <sup>3</sup>                                    |
| Mjerenje vrijednosti protoka | At P1 = 7 bar and pressure drop $\Delta p = 0,1$ bar       |

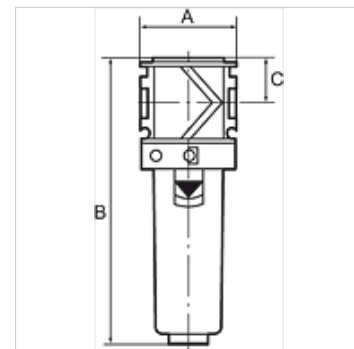

## Napomena

Activated carbon filters are also supplied with protective cage or metal container.

Drugi podatci na zahtjev.

## Opis

The activated carbon filter absorbs oil vapour from the compressed air. The entering compressed air needs to be dry and free of contaminants (an upstream microfilter is strongly recommended).

## Artikl

| Naziv          | Navoj | Protok (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|----------------|--------|----------|--------|
| K- 07 25 23 12 | G 1/4 | 800            | 48,0   | 142,0 mm | 22,0   |
| K- 07 25 23 13 | G 3/8 | 1000           | 48,0   | 142,0 mm | 22,0   |
| K- 07 25 23 14 | G 1/2 | 1200           | 70,0   | 193,0 mm | 26,0   |
| K- 07 25 23 15 | G 3/4 | 1300           | 70,0   | 193,0 mm | 26,0   |
| K- 07 25 23 16 | G 1   | 1300           | 124,0  | 193,0 mm | 26,0   |