



K-STECKVERBINDU 1

Straight push-in connector

HANSA FLEX

Karakteristike

| | |
|-------------------|------------------|
| Radni tlak | Max. 16 bar |
| Radna temperatura | -20 °C to +80 °C |
| Materijal | poniklani mjed |
| Pritisni prsten | Hostaform |
| Stezni prsten | Stainless steel |

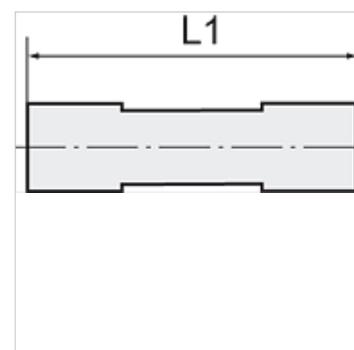

Napomena

Drugi podatci na zahtjev.

Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artikl

| Naziv | Navoj | za vanjski Ø crijeva | L1 (mm) |
|----------------|------------|----------------------|------------|
| K- 07 40 25 18 | M 8 x 0.75 | 3 mm | 18,4 |
| K- 07 40 25 19 | M 11 x 1 | 4 mm | 30,6 |
| K- 07 40 25 20 | M 14 x 1 | 5 mm | 33,5 |
| K- 07 40 25 21 | M 13 x 1 | 6 mm | 33,0 |
| K- 07 40 25 22 | M 15 x 1 | 8 mm | 35,7 |
| K- 07 40 25 23 | M 17 x 1 | 10 mm | 39,2 |
| K- 07 40 25 24 | M 20 x 1 | 12 mm | 39,7 |
| K- 07 40 25 25 | M 24 x 1 | 14 mm | 45,9 |