

# K-T-STECK VERS DRE AG OR 1

Male branch tees, swivel type, parallel male thread with O-ring

## Karakteristike

| | |
|---|---|
| **Radni tlak** | Max. 16 bar |
| **Radna temperatura** | -20 °C to +80 °C |
| **Materijal** | poniklani mjed |
| **Pritisni prsten** | Hostaform |
| **O prsten** | NBR |
| **Stezni prsten** | Stainless steel |

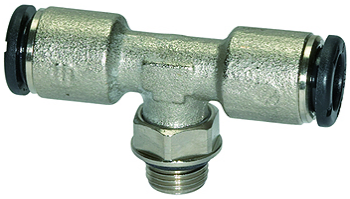

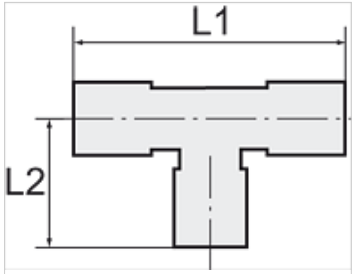


## Napomena

Drugi podatci na zahtjev.

## Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikl

| Naziv | Navoj | za vanjski Ø crijeva | L1 (mm) | L2 (mm) | SW (veličina ključa) |
|---|---|---|---|---|---|
| **K- 07 40 47 21** | M 5 | 4 mm | 37,2 | 15,3 | 9 mm |
| **K- 07 40 47 22** | M 5 | 6 mm | 43,8 | 15,3 | 9 mm |
| **K- 07 40 25 91** | G 1/8 | 4 mm | 37,2 | 19,1 | 12 mm |
| **K- 07 40 25 92** | G 1/8 | 5 mm | 44,6 | 19,1 | 12 mm |
| **K- 07 40 25 93** | G 1/8 | 6 mm | 43,8 | 19,1 | 12 mm |
| **K- 07 40 25 94** | G 1/8 | 8 mm | 50,8 | 19,1 | 12 mm |
| **K- 07 40 47 23** | G 1/4 | 4 mm | 37,2 | 21,1 | 14 mm |
| **K- 07 40 25 89** | G 1/4 | 6 mm | 43,8 | 21,1 | 14 mm |
| **K- 07 40 25 90** | G 1/4 | 8 mm | 50,8 | 21,1 | 14 mm |
| **K- 07 40 25 88** | G 1/4 | 10 mm | 54,4 | 21,8 | 14 mm |
| **K- 07 40 25 97** | G 3/8 | 8 mm | 47,2 | 27,1 | 17 mm |
| **K- 07 40 25 95** | G 3/8 | 10 mm | 54,4 | 27,1 | 17 mm |
| **K- 07 40 25 96** | G 3/8 | 12 mm | 59,0 | 27,1 | 17 mm |
| **K- 07 40 25 86** | G 1/2 | 12 mm | 59,0 | 30,7 | 22 mm |
| **K- 07 40 25 87** | G 1/2 | 14 mm | 66,0 | 32,3 | 22 mm |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*