


# K-T-STECK VERS DRE AG-K

Male branch tees, swivel type, parallel male thread

**HANSA FLEX**

## Karakteristike

|                   |                  |
|-------------------|------------------|
| Radni tlak        | Max. 16 bar      |
| Radna temperatura | -20 °C to +80 °C |
| Materijal         | poniklani mjed   |
| Pritisni prsten   | Hostaform        |
| Stezni prsten     | Stainless steel  |

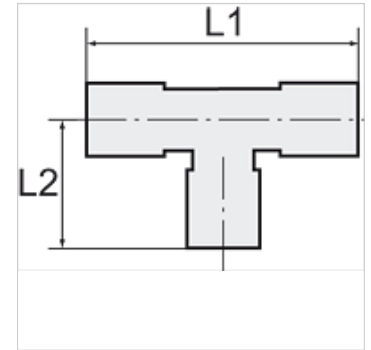

## Napomena

Drugi podatci na zahtjev.

## Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikl

| Naziv          | Navoj | za vanjski Ø crijeva | L1<br>(mm) | L2<br>(mm) | SW (veličina ključa) |
|----------------|-------|----------------------|------------|------------|----------------------|
| K- 07 40 27 18 | R 1/8 | 4 mm                 | 37,2       | 19,8       | 12 mm                |
| K- 07 40 27 19 | R 1/8 | 6 mm                 | 43,8       | 19,8       | 12 mm                |
| K- 07 40 27 20 | R 1/8 | 8 mm                 | 50,8       | 19,8       | 12 mm                |
| K- 07 40 27 15 | R 1/4 | 4 mm                 | 37,2       | 22,6       | 14 mm                |
| K- 07 40 27 16 | R 1/4 | 6 mm                 | 43,8       | 22,6       | 14 mm                |
| K- 07 40 27 17 | R 1/4 | 8 mm                 | 50,8       | 23,6       | 14 mm                |
| K- 07 40 27 14 | R 1/4 | 10 mm                | 54,4       | 26,3       | 14 mm                |
| K- 07 40 27 22 | R 3/8 | 8 mm                 | 47,2       | 27,1       | 17 mm                |
| K- 07 40 27 21 | R 3/8 | 10 mm                | 54,4       | 27,1       | 17 mm                |