
K-T-STECK VB 1

Union tees

Karakteristike

Radni tlak	Max. 16 bar
Radna temperatura	-20 °C to +150 °C
Materijal	poniklani mjed
Pritisni prsten	Nickel-plated brass
Stezni prsten	Stainless steel



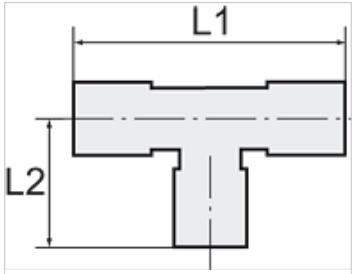

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikl

Naziv	za vanjski Ø crijeva	L1 (mm)	L2 (mm)
K- 07 40 27 57	4 mm	34,0	17,0
K- 07 40 27 58	6 mm	39,0	19,5
K- 07 40 27 59	8 mm	46,0	23,0
K- 07 40 27 60	10 mm	50,0	25,0
K- 07 40 47 81	12 mm	54,0	27,0
K- 07 40 47 82	14 mm	62,0	31,0

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.