
K-STECKVERSCHR AGR-K SK BESCH

Male connectors, conical male thread, coated with outer hex

Karakteristike

Radni tlak	Max. 16 bar
Radna temperatura	-20 °C to +150 °C
Materijal	poniklani mjed
Pritisni prsten	Nickel-plated brass
Stezni prsten	Stainless steel



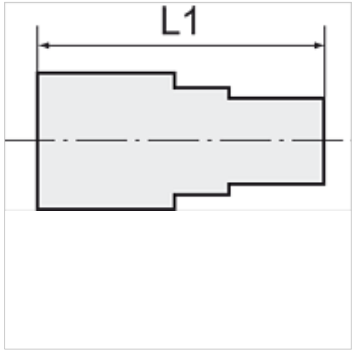

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikl

Naziv	Navoj	za vanjski Ø crijeva	L1 (mm)	SW (veličina ključa)
K- 07 40 27 26	R 1/8	4 mm	22,5	10 mm
K- 07 40 27 27	R 1/8	6 mm	24,5	11 mm
K- 07 40 27 28	R 1/8	8 mm	27,5	13 mm
K- 07 40 47 62	R 1/4	4 mm	22,5	14 mm
K- 07 40 27 24	R 1/4	6 mm	24,5	14 mm
K- 07 40 27 25	R 1/4	8 mm	27,5	13 mm
K- 07 40 27 23	R 1/4	10 mm	32,5	16 mm
K- 07 40 47 61	R 1/4	12 mm	32,5	17 mm
K- 07 40 27 30	R 3/8	8 mm	28,0	17 mm
K- 07 40 27 29	R 3/8	10 mm	32,5	17 mm
K- 07 40 47 63	R 3/8	12 mm	30,5	17 mm
K- 07 40 47 60	R 1/2	12 mm	33,0	22 mm

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.