


K-T-STECK VERS DRE AG-K BE

Male branch tees, swivel type, conical male thread, coated

HANSA FLEX

Karakteristike

| | |
|-----------------------|--|
| Radni tlak | Max. 15 bar, coarse vacuum |
| Područje primjene | Air, vacuum |
| preporučena crijeva | PU or PA (nylon) |
| Mediji | Compressed air and all gases or liquids that are compatible with the materials |
| Temperaturno područje | -20 °C to +80 °C |
| Brtvena površina | Conical version: thread coating |
| Materijal | Plastic, Nickel plated brass |
| Pritisni prsten | Plastic |

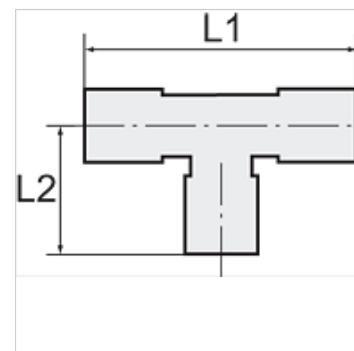

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikli

| Naziv | Navoj | za vanjski Ø crijeva | L1 (mm) | L2 (mm) | SW (veličina ključa) |
|----------------|-------|----------------------|------------|------------|----------------------|
| K- 07 40 02 89 | R 1/8 | 4 mm | 36,0 | 21,0 | 10 mm |
| K- 07 40 02 90 | R 1/8 | 6 mm | 40,0 | 22,1 | 10 mm |
| K- 07 40 02 91 | R 1/8 | 8 mm | 45,4 | 26,6 | 10 mm |
| K- 07 40 02 86 | R 1/4 | 4 mm | 36,0 | 22,5 | 14 mm |
| K- 07 40 02 87 | R 1/4 | 6 mm | 40,0 | 23,6 | 14 mm |
| K- 07 40 02 88 | R 1/4 | 8 mm | 45,4 | 25,2 | 14 mm |
| K- 07 40 02 84 | R 1/4 | 10 mm | 53,8 | 29,6 | 17 mm |
| K- 07 40 02 85 | R 1/4 | 12 mm | 58,6 | 30,9 | 17 mm |
| K- 07 40 02 95 | R 3/8 | 6 mm | 40,0 | 25,1 | 17 mm |
| K- 07 40 02 96 | R 3/8 | 8 mm | 45,4 | 26,7 | 17 mm |
| K- 07 40 02 92 | R 3/8 | 10 mm | 53,8 | 28,1 | 17 mm |
| K- 07 40 02 93 | R 3/8 | 12 mm | 58,6 | 29,4 | 17 mm |
| K- 07 40 02 94 | R 3/8 | 16 mm | 69,0 | 36,2 | 20 mm |
| K- 07 40 02 82 | R 1/2 | 6 mm | 40,0 | 28,1 | 21 mm |
| K- 07 40 02 83 | R 1/2 | 8 mm | 45,4 | 29,7 | 21 mm |
| K- 07 40 02 79 | R 1/2 | 10 mm | 53,8 | 31,1 | 21 mm |
| K- 07 40 02 80 | R 1/2 | 12 mm | 58,6 | 32,4 | 21 mm |
| K- 07 40 02 81 | R 1/2 | 16 mm | 69,0 | 39,2 | 21 mm |