


# K-T-STECK VERS DRE AG-K BE

Male branch tees, swivel type, conical male thread, coated

**HANSA FLEX**

## Karakteristike

|                       |  |
|-----------------------|--|
| Radni tlak            | Max. 15 bar, coarse vacuum   |
| Područje primjene     | Air, vacuum  |
| preporučena crijeva   | PU or PA (nylon)   |
| Mediji                | Compressed air and all gases or liquids that are compatible with the materials |
| Temperaturno područje | -20 °C to +80 °C   |
| Brtvena površina      | Conical version: thread coating  |
| Materijal             | Plastic, Nickel plated brass   |
| Pritisni prsten       | Plastic  |

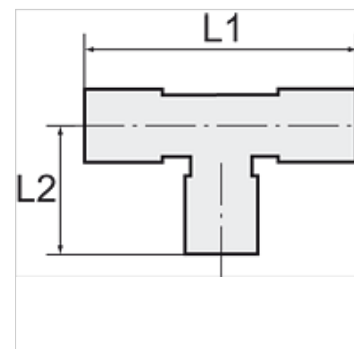

## Napomena

Drugi podatci na zahtjev.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikli

| Naziv          | Navoj | za vanjski Ø crijeva | L1<br>(mm) | L2<br>(mm) | SW (veličina ključa) |
|----------------|-------|----------------------|------------|------------|----------------------|
| K- 07 40 02 89 | R 1/8 | 4 mm                 | 36,0       | 21,0       | 10 mm                |
| K- 07 40 02 90 | R 1/8 | 6 mm                 | 40,0       | 22,1       | 10 mm                |
| K- 07 40 02 91 | R 1/8 | 8 mm                 | 45,4       | 26,6       | 10 mm                |
| K- 07 40 02 86 | R 1/4 | 4 mm                 | 36,0       | 22,5       | 14 mm                |
| K- 07 40 02 87 | R 1/4 | 6 mm                 | 40,0       | 23,6       | 14 mm                |
| K- 07 40 02 88 | R 1/4 | 8 mm                 | 45,4       | 25,2       | 14 mm                |
| K- 07 40 02 84 | R 1/4 | 10 mm                | 53,8       | 29,6       | 17 mm                |
| K- 07 40 02 85 | R 1/4 | 12 mm                | 58,6       | 30,9       | 17 mm                |
| K- 07 40 02 95 | R 3/8 | 6 mm                 | 40,0       | 25,1       | 17 mm                |
| K- 07 40 02 96 | R 3/8 | 8 mm                 | 45,4       | 26,7       | 17 mm                |
| K- 07 40 02 92 | R 3/8 | 10 mm                | 53,8       | 28,1       | 17 mm                |
| K- 07 40 02 93 | R 3/8 | 12 mm                | 58,6       | 29,4       | 17 mm                |
| K- 07 40 02 94 | R 3/8 | 16 mm                | 69,0       | 36,2       | 20 mm                |
| K- 07 40 02 82 | R 1/2 | 6 mm                 | 40,0       | 28,1       | 21 mm                |
| K- 07 40 02 83 | R 1/2 | 8 mm                 | 45,4       | 29,7       | 21 mm                |
| K- 07 40 02 79 | R 1/2 | 10 mm                | 53,8       | 31,1       | 21 mm                |
| K- 07 40 02 80 | R 1/2 | 12 mm                | 58,6       | 32,4       | 21 mm                |
| K- 07 40 02 81 | R 1/2 | 16 mm                | 69,0       | 39,2       | 21 mm                |