


K-T-MEHRF-VERT DREH AGR-K

Tee distributors with conical male thread, coated, swivel type

HANSA FLEX

Karakteristike

| | |
|-----------------------|--|
| Radni tlak | Max. 15 bar, coarse vacuum |
| Područje primjene | Air, vacuum |
| preporučena crijeva | PU or PA (nylon) |
| Mediji | Compressed air and all gases or liquids that are compatible with the materials |
| Temperaturno područje | -20 °C to +80 °C |
| Brtvena površina | Conical version: thread coating |
| Materijal | Plastic, Nickel plated brass |
| Pritisni prsten | Plastic |

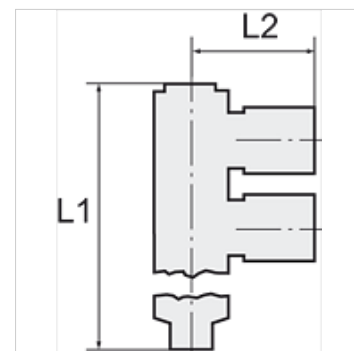

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikli

| Naziv | Navoj | za vanjski Ø crijeva | L1 (mm) | L2 (mm) | SW (veličina ključa) |
|----------------|-------|----------------------|------------|------------|----------------------|
| K- 07 40 06 33 | R 1/8 | 4 x 4 mm | 63,5 | 19,0 | 10 mm |
| K- 07 40 06 35 | R 1/8 | 4 x 6 mm | 68,0 | 24,0 | 12 mm |
| K- 07 40 06 37 | R 1/8 | 4 x 8 mm | 88,0 | 24,0 | 14 mm |
| K- 07 40 06 29 | R 1/4 | 4 x 6 mm | 70,5 | 24,0 | 12 mm |
| K- 07 40 06 31 | R 1/4 | 4 x 8 mm | 90,0 | 24,0 | 14 mm |
| K- 07 40 06 41 | R 3/8 | 4 x 8 mm | 91,5 | 24,0 | 14 mm |
| K- 07 40 06 48 | R 1/8 | 1 x 6 mm / 3 x 4 mm | 64,3 | 19,0 | 12 mm |
| K- 07 40 06 45 | R 1/4 | 1 x 8 mm / 3 x 6 mm | 70,9 | 20,3 | 14 mm |
| K- 07 40 42 75 | R 1/4 | 1 x 6 mm / 3 x 4 mm | 66,2 | 19,6 | 14 mm |
| K- 07 40 42 76 | R 1/4 | 1 x 8 mm / 3 x 4 mm | 70,4 | 20,6 | 14 mm |
| K- 07 40 42 77 | R 3/8 | 1 x 8 mm / 3 x 6 mm | 71,9 | 20,6 | 17 mm |
| K- 07 40 06 54 | R 3/8 | 1 x 10 mm / 3 x 8 mm | 92,1 | 23,9 | 17 mm |