


K-L-STECK VERS DER AG OR 2

Male branch tees, angled plug connections, swivel type, parallel male thread with O-ring

HANSA FLEX

Karakteristike

| | |
|-------------------|---------------------|
| Radni tlak | Max. 16 bar |
| Radna temperatura | -20 °C to +150 °C |
| Materijal | poniklani mjed |
| Pritisni prsten | Nickel-plated brass |
| O prsten | FKM (FPM) |
| Stezni prsten | Stainless steel |

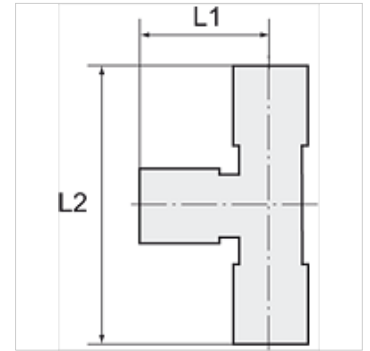

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikli

| Naziv | Navoj | za vanjski Ø crijeva | L1 (mm) | L2 (mm) | SW (veličina ključa) |
|----------------|-------|----------------------|------------|------------|----------------------|
| K- 07 40 27 88 | G 1/8 | 4 mm | 17,5 | 35,5 | 13 mm |
| K- 07 40 27 89 | G 1/8 | 6 mm | 21,0 | 41,5 | 13 mm |
| K- 07 40 27 90 | G 1/8 | 8 mm | 23,0 | 43,0 | 13 mm |
| K- 07 40 27 86 | G 1/4 | 6 mm | 21,0 | 45,5 | 13 mm |
| K- 07 40 27 87 | G 1/4 | 8 mm | 23,0 | 47,5 | 13 mm |
| K- 07 40 27 85 | G 1/4 | 10 mm | 27,0 | 50,5 | 16 mm |
| K- 07 40 47 92 | G 3/8 | 8 mm | 23,0 | 48,5 | 13 mm |
| K- 07 40 27 91 | G 3/8 | 10 mm | 27,0 | 54,0 | 16 mm |
| K- 07 40 47 91 | G 3/8 | 12 mm | 31,0 | 57,5 | 18 mm |
| K- 07 40 47 90 | G 1/2 | 12 mm | 32,0 | 65,5 | 20 mm |