
K-T-STECK VERS ASK DREH AG OR

Male branch tees with outer hex, swivel type, parallel male thread with O-ring

Karakteristike

Radni tlak	Max. 16 bar
Radna temperatura	-20 °C to +150 °C
Materijal	poniklani mjed
Pritisni prsten	Nickel-plated brass
O prsten	FKM (FPM)
Stezni prsten	Stainless steel



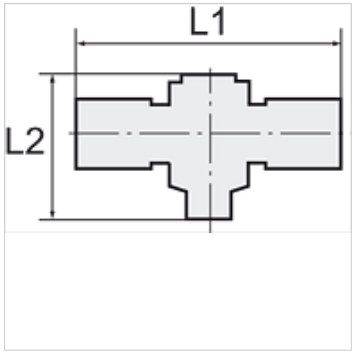

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikl

Naziv	Navoj	za vanjski Ø crijeva	L1 (mm)	L2 (mm)	SW (veličina ključa)
K- 07 40 28 04	G 1/8	4 mm	42,0	28,0	14 mm
K- 07 40 28 05	G 1/8	6 mm	46,0	28,0	14 mm
K- 07 40 28 03	G 1/4	6 mm	48,0	33,0	17 mm

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.