


K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

HANSA FLEX

Karakteristike

Ulazni tlak	Max. 16 bar
Izlazni tlak	corresponds to the set pressure of the pilot pressure regulator
Temperatura medija	max. 60 °C
Okolna temperatura	Max. 60 °C
Brtveni materijal	NBR
Kućište	Die-cast zinc, Aluminium for G 1 variant
Mjerenje vrijednosti protoka	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar
Priključak za upravljački zrak	G 1/8

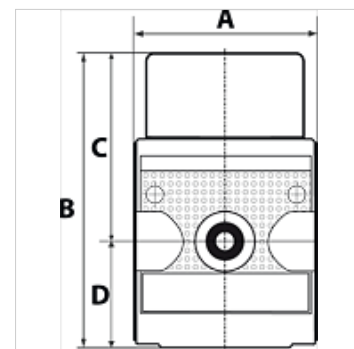

Napomena

Drugi podatci na zahtjev.

Opis

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Artikli

Naziv	Navoj	Protok (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 19 56	G 1/4	1800	48,0	75,0 mm	48,0	27,0
K- 07 25 19 57	G 1/2	4800	69,0	94,0 mm	59,0	35,0
K- 07 25 19 58	G 1	12500	100,0	112,0 mm	60,0	52,0

Rezervni dijelovi

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-VERSCHLEI-SATZ MULTIFIX	Set of wearing parts »multifix«