


# K-SCHLAUCH VB POLYPROP

Hose connectors - polypropylene

**HANSA FLEX**

## Karakteristike

|                          |   |
|--------------------------|---|
| <b>Radni tlak</b>        | Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 2.5 bar (at 90 °C) |
| <b>Materijal</b>         | Polypropylene (PP)  |
| <b>Radna temperatura</b> | Max. 90 °C  |

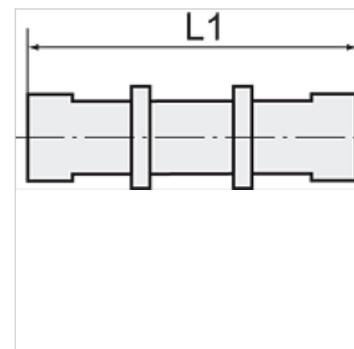

## Napomena

Drugi podatci na zahtjev.

## Opis

Chemically resistant to almost all inorganic acids and bases, even in high concentrations and at temperatures greater than 90 °C.

## Artikli

| Naziv          | za crijevo   | L1<br>(mm) | SW (veličina ključa) |
|----------------|--------------|------------|----------------------|
| K- 07 40 41 47 | 4 mm / 6 mm  | 39,0       | 14 mm                |
| K- 07 40 41 51 | 6 mm / 8 mm  | 49,0       | 19 mm                |
| K- 07 40 41 53 | 8 mm / 10 mm | 55,0       | 22 mm                |
| K- 07 40 41 55 | 9 mm / 12 mm | 64,0       | 24 mm                |