


K-SCHALLDAE STECKNIPPEL

Silencers with push-in plug (pressure max. 10 bar)

HANSA FLEX

Karakteristike

| | |
|-----------------------|--|
| Radni tlak | Max. 15 bar, coarse vacuum |
| Područje primjene | Air, vacuum |
| preporučena crijeva | PU or PA (nylon) |
| Mediji | Compressed air and all gases or liquids that are compatible with the materials |
| Temperaturno područje | -20 °C to +80 °C |
| Brtvena površina | Parallel version: O-ring in housing, Conical version: thread coating |
| Materijal | Plastic, Nickel plated brass |
| Pritisni prsten | Plastic |

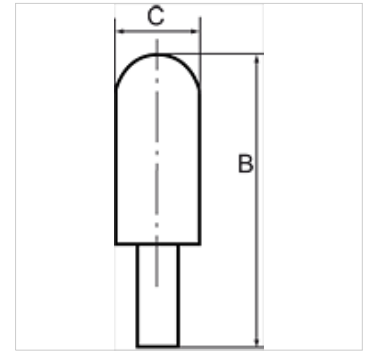

Napomena

Drugi podatci na zahtjev.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikli

| Naziv | za vanjski Ø crijeva | L1 (mm) |
|----------------|----------------------|---------|
| K- 07 40 46 91 | 6 mm | 46,5 |
| K- 07 40 46 92 | 8 mm | 45,0 |
| K- 07 40 46 93 | 10 mm | 58,0 |
| K- 07 40 46 94 | 12 mm | 81,5 |